

iA (intelligent Auto) H.265 Network Camera

Panasonic WV-S1531LN captures the highest quality images automatically even in very challenging and fast-changing surveillance environments. Intelligent Auto (iA) allows the camera to automatically adjust the key settings in real-time depending on the scenery and movement, reducing distortion such as motion blur and moving objects. New industry-leading 144dB dynamic range delivers balanced scene exposure in dynamic and extreme-backlit lighting environments. In addition, color night vision provides outstanding low-light performance with accurate color rendition and saturation from i-Pro's 1/3" sensor, rivaling the performance of costlier 1/2" sensor cameras in the market. The adopted H.265 Smart Coding technology, intelligently reduces bandwidth efficiency of up to 95%* more than H.264 for longer recording and less storage. Cameras out-of-the-box, support full data encryption streaming and is compliant to FIPS 140-2 Level 1 standards to keep your video secured.

*Value in Advanced mode with Smart Facial Coding. It depends on the scene.

Extreme image quality allows evidence to be captured even under challenging conditions

- Auto Shutter speed control for fast moving vehicles
- Sharp and clear images of a walking person day & night
- Outstanding low light performance in true color with low noise for night time applications
- Super Dynamic 144dB for backlit situations involving headlights and shadows on night streets
- Environmental durability : IP66, IK10 and Dehumidification device

Extreme H.265 compression with new Smart Coding

- Longer recording and less storage compared to any H.264 based compression techniques
- New self-learning ROI* encoding (Auto VIQS) detects movement within the image and compresses the areas with little motion in order to reduce transmitted data while maintaining the quality of the image.
- New "Smart Facial Coding" adds more bandwidth reduction for ID camera applications mainly capturing faces

*Region of Interest

Extreme Data Security

- Full encryption SD card edge recording to keep your data safe
- FIPS 140-2 Level 1 compliant
- Full end-to-end system encryption with supported VMS and devices to protect from IP snooping/spoofing and detect data alteration

Key Features

- Full HD 1080p 60fps
- iA (intelligent Auto)
- Extreme Super Dynamic 144dB
- Color night vision (0.0008 to 0.012 lx)
- H.265 Smart Coding
- FIPS 140-2 Level 1 compliant
- ClearSight Coating

Industry examples

- Public safety (City / Highway toll / Parking gate)
- Transportation (Airport / Train / Subway)
- Retail / Bank / Logistics / Education / Hospital / Building



Specifications

| | | | |
|------------------------|---|--|--|
| Camera | Image Sensor | Approx. 1/3 type MOS image sensor | |
| | Minimum Illumination | Color : 0.012 lx, BW : 0.006 lx (F1.6, Maximum shutter : Off (1/30s), AGC : 11) BW : 0 lx (F1.6, Maximum shutter : Off (1/30 s), AGC : 11, when the IR LED is lit) Color : 0.0008 lx, BW : 0.0004 lx (F1.6, Maximum shutter : max. 16/30s, AGC : 11) ** | |
| | White Balance | AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000 K) | |
| | Shutter Speed | 1/30 Fix to 1/10000 Fix *1/30 Fix to 2/120 Fix is available during 30 fps mode only. *1/60 Fix is available during 60 fps mode only. | |
| | Intelligent Auto | On / Off | |
| | Super Dynamic ² | On / Off, the level can be set in the range of 0 to 31. | |
| | Dynamic Range | 144 dB (Super Dynamic : On) | |
| | Adaptive Black Stretch | The level can be set in the range of 0 to 255. | |
| | Back light compensation / High light compensation | BLC (Back light compensation) / HLC (High light compensation) / Off (only when Super dynamic and Intelligent Auto : Off) | |
| | Fog compensation | On / Off (only when Intelligent auto / auto contrast adjust : Off) | |
| | Maximum gain (AGC) | The level can be set in the range of 0 to 11. | |
| | Color/BW (ICR) | Off / On (IR Light Off) / On (IR Light On) / Auto1 (IR Light Off) / Auto2 (IR Light On) / Auto3 (SCC) | |
| | IR LED | High / Middle / Low / Off, Maximum irradiation distance : 40 m (Approx. 131 ft) | |
| | Digital Noise Reduction | The level can be set in the range of 0 to 255. | |
| | Video Motion Detection (VMD) | On / Off, 4 areas available | |
| | Intelligent VMD (i-VMD) ³ | Type 4 * optional plug-in software WV-SAE200 | |
| | Stabilizer ³ | On / Off (available only in the 30 fps mode) | |
| | Privacy Zone | On / Off (up to 8 zones available) | |
| | Image rotation ⁴ | 0 ° / 90 ° / 180 ° / 270 ° | |
| | Camera Title (OSD) | On / Off Up to 20 characters (alphanumeric characters, marks) | |
| | Focus Adjustment | Auto back focus / Manual | |
| | Lens | Focal length | 2.8 - 10 mm (1/8 inches - 13/32 inches) |
| | | Zoom ratio | 3.6 x (Motorized zoom / Motorized focus) |
| Angular Field of View | | [16 : 9 mode] Horizontal : 31° (TELE) - 112° (WIDE) Vertical : 17° (TELE) - 60° (WIDE) [4 : 3 mode] Horizontal : 26° (TELE) - 91° (WIDE) Vertical : 19° (TELE) - 67° (WIDE) | |
| Maximum Aperture Ratio | | 1 : 1.6 (WIDE) - 1 : 3.4 (TELE) | |
| Focusing Range | | 0.3 m (11-13/16 inches) - ∞ | |
| Adjusting Angle | Ceiling mounting | Horizontal : ±180 ° (PAN rotation part) Vertical : 0 ° to 100 ° (TILT rotation part) Yaw : -190 ° to +100 ° (YAW rotation part) | |
| | Wall mounting | Horizontal : ±100 ° (TILT rotation part)* Vertical : ±100 ° (TILT rotation part)* Yaw : -190 ° to +100 ° (YAW rotation part) * You can change between horizontal and vertical angels by adjusting the PAN rotation part. | |
| Browser GUI | Camera Control | Brightness, AUX On / Off | |
| | Audio | Mic (Line) Input : On / Off Volume adjustment : Low / Middle / High Audio Output : On / Off Volume adjustment : Low / Middle / High | |
| | GUI / Setup Menu Language | English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese | |
| Network | Network IF | 10Base-T / 100Base-TX, RJ45 connector | |
| | Resolution | *2 mega pixel [16 : 9] (30/60 fps) 1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 | |
| | H.265/ H.264 JPEG (MJPEG) | *3 mega pixel [4 : 3] (30 fps) 2,048 x 1,536 ⁵ / 1,280 x 960 / 800 x 600 / 640 x 480 / 400 x 300 / 320 x 240 | |
| | H.265/ H.264 ⁶ | Transmission Mode Constant bit rate / VBR / Frame rate / Best effort | |
| | JPEG | Transmission Type Unicast / Multicast Image Quality 10 steps | |

| | | | |
|----------------------|---|---|--|
| Network | Smart Coding | Smart Facial Coding ³ : On (Smart Facial Coding) / On (Auto VQS) / Off *Smart Facial Coding is only available with Stream(1). GOP (Group of pictures) : On (Advanced) / On (Low) / On (Mid) / Off *On(Advanced) is only available with H.265. | |
| | Audio Compression | G.726 (ADPCM) : 16 kbps / 32 kbps G.711 : 64 kbps AAC-LC ⁷ : 64 kbps / 96 kbps / 128 kbps | |
| | Audio transmission mode | Off / Mic (Line) input / Audio output / Interactive (Half duplex) / Interactive (Full duplex) | |
| | Supported Protocol | IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, FTP, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP, IEEE 802.1X, DiffServ IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ | |
| | No. of Simultaneous Users | Up to 14 users (Depends on network conditions) | |
| | SDXC/SDHC/SD | H.265 / H.264 recording : Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure JPEG recording : Manual REC / Alarm REC (Pre/Post) / Backup upon network failure | |
| | Memory Card (Option) | Compatible SDXC/SDHC/SD Memory Card : Panasonic 2 GB, 4 GB*, 8 GB*, 16 GB*, 32 GB*, 64 GB**, 128 GB**, 256 GB** model *SDHC card, **SDXC card (except miniSD card and microSD card) | |
| | Mobile Terminal Compatibility | iPad, iPhone, Android™ mobile terminals | |
| | Alarm | Alarm Source | 3 terminals input, VMD alarm ⁸ , Command alarm, Audio detection alarm |
| | | Alarm Actions | SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification Indication on browser, FTP image transfer, Panasonic alarm protocol output |
| Input/ Output | Monitor Output (for adjustment) | VBS : 1.0 V [p-p] / 75 Ω, composite, Pin jack An NTSC or PAL signal can be outputted from camera | |
| | Audio input | Ø3.5 mm stereo mini jack Input impedance: Approx. 2 kΩ (unbalanced) (Applicable microphone : Plug-in power type) Supply voltage : 2.5 V ±0.5 V | |
| | Audio Output | Ø3.5 mm stereo mini jack (monaural output) Output impedance : Approx. 600 Ω (unbalanced) | |
| General | External I/O Terminals | ALARM IN1(Alarm input 1/ Black & white input/ Auto time adjustment input), ALARM IN2(Alarm input 2/ ALARM OUT), ALARM IN3(Alarm input 3/ AUX OUT) (x1 for each) | |
| | Safety | UL (UL60950-1), c-UL (CSA C22.2 No.60950-1), CE, IEC60950-1 | |
| | EMC | FCC (Part15 ClassA), ICES003 ClassA, EN55032 ClassB, EN55024 | |
| | Power Source and Power Consumption | DC power supply : DC12 V 750 mA, Approx. 9.0 W PoE (IEEE802.3af compliant) Device : DC48 V 195 mA, Approx. 9.4 W (Class 0 device) | |
| | Ambient Operating Temperature | IR LED : On -40 °C to +50 °C (-40 °F to 122 °F), IR LED : Off -40 °C to +60 °C (-40 °F to 140 °F) (Power On range : -30 °C to +60 °C (-22 °F to +140 °F)) | |
| | Ambient Operating Humidity | 10 to 100 % (no condensation) | |
| | Water and Dust Resistance | IP66, IEC60529 measuring standard compatible, Type 4X(UL50), NEMA 4X compliant | |
| | Shock Resistance | IK10 (IEC 62262) | |
| | Dimensions | 130 mm (W) x 130 mm (H) x 337 mm (L) | |
| | Mass (approx.) | [5-1/8 inches (W) x 5-1/8 inches (H) x 13-9/32 inches (L)] Approx. 1.6 kg (3.53 lbs) When using the adapter box : Approx. 2.1 kg (4.63 lbs) | |
| Finish | Main body : Aluminum die cast, Metallic silver Front cover section clear part : Clear polycarbonate resin (ClearSight coating) | | |

*1 Converted value

*2 Super Dynamic function is automatically set off on 60 fps mode.

*3 Stabilizer, Smart Facial Coding, i-VMD can not be used at the same time.

*4 When "3 mega pixel [4 : 3](30fps mode)" is selected for "Image capture mode", "90 °" and "270 °" cannot be selected.


*5 Used by super resolution techniques

*6 Transmission for 4 streams can be individually set.

*7 When recording audio on an SD memory card, only use AAC-LC (Advanced Audio Coding - Low Complexity).

*8 Including alarms from Plug-in Software

Appearance

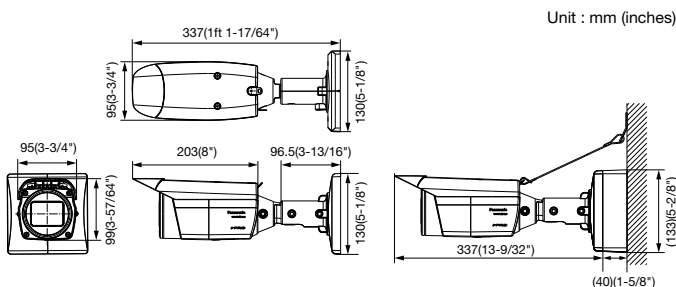

Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.

- Android is a trademark of Google LLC.

- ONVIF and the ONVIF logo are trademarks or registered trademarks of Onvif Inc.

- All other trademarks identified herein are the property of their respective owners.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.

Optional Accessories

| | | | |
|---|--|---|--|
| Pole Mount Bracket WV-Q188 (Fine silver) | | Corner Mount Bracket WV-Q189 (Fine silver) | |
|---|--|---|--|

Plug-in Software for i-VMD

WV-SAE200

i-VMD is possible to detect objects in the specified area by advanced video analysis technology.

i-VMD : Intruder Detection, Loitering Detection, Direction Detection, Scene Change Detection, Object Detection, Cross Line Detection



Important

- Safety Precaution : Carefully read the Important Information, Installation Guide and operating instructions before using this product.

- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

DISTRIBUTED BY :

Panasonic

<https://security.panasonic.com>

<https://www.facebook.com/PanasonicNetworkCamera>

(2A-181DA)